



New Doosan Warehouse Equipment

Order Picker with Scissor Lift

LEKX 20

LOAD CAPACITY 2,000 kg; LIFTING HEIGHT 700 mm

Design features

- Powerfull and economical per AC controlled drive contactorless electronics
- Strong drive motor for a optimal traction
- Robust, stabil 4-point chassis with small truck dimension

Operating Elements

- Multifunctional, ergonomical handles
- Controller for smooth ones drive forward and backwards
- Controller for electrical steering
- Back-Stage bushbotton for driving and lowering

Made in Germany

Standard Equipment

- Drive wheel Vulkollan
- Load wheels Vulkollan

Options

- Battery 24v 3 EPzS up to 375 Ah
- Cold store version up to -30 deg




Technical Specification

Type denomination by manufacturer			LEKX20
Load capacity lift carriage	Q	kg	2000
Load centre distance	c	mm	1200
Lifting Height	h3	mm	90
Height when lowered	h13	mm	700
Gripping height for vertical tow bar	h14	mm	970
Vehicle length	L	mm	3670
Vehicle width	B	mm	795
Leading structure length	l2	mm	1220
Wheel base	y	mm	2160
Distance rear wall / centre tandem bridge	RTA	mm	1585
Fork length	l	mm	2350
Fork width	e	mm	200
Dimension across forks	b5	mm	570
Turn Radius	RWa	mm	2850
Empty weight (without battery)	m	kg	900
Gangway width (800x1200 lengthwise)	Ast	mm	4120
Capacity		Ah	..360
Voltage		V	24
Batteries (Tub LBH 610x200x510..610mm)	24V3EPZH	..330Ah	.
Propulsion motor output	n/V/kW		1/24/2,6
Drive control	AC		AC
Hoisting motor output	n/V/kW		1/24/2,2

We reserve the right at any time to carry out technical alterations

· = on request

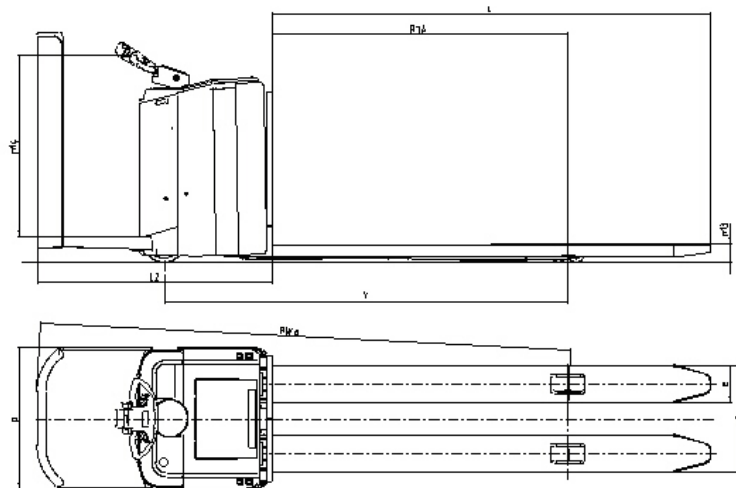

Doosan Infracore
Forklifts

Europien Office: Europark Noord 36 B-9100 Sint Niklaas
 Tel: +3237600987
 Fax: +3237600989
 Web site: www.doosaneurope.com

